BC.3.25/27 P/T REAR AND SIDE CONNECTORS 1/2" BSP- 3 RODS

BC	Module base
3	CETOP 3/NG6
******	**25** = 1/2" BSP rear and side connectors with CMP **27** = 1/2" BSP rear and side connectors without CMP
*****	Adjustment (omit for 27 version) **M** = Plastic knob **C** = Grub screw
*****	Setting range (omit for 27 version) **1** = max. 50 bar **(white spring)** **2** = max. 150 bar **(yellow spring)** **3** = max. 320 bar **(green spring)**
00	No variant
1	Serial No.

Weight BC.3.25: 2,7 Kg
Weight BC.3.27: 2,6 Kg
Fixing screws M5x30 UNI 5931

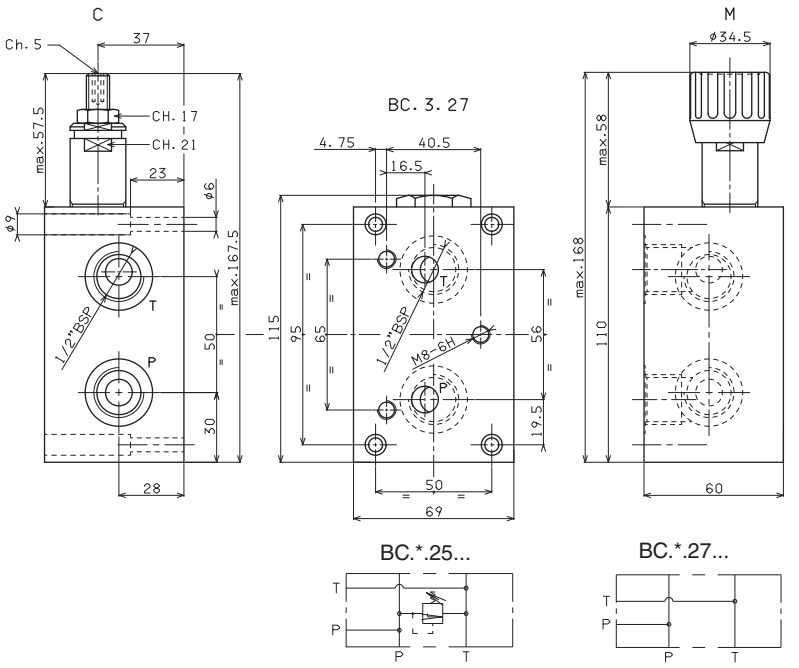

• The minimum permissible setting pressure depending on the spring: see cartridge valve type CMP.10...

BC.3.30/32 - 3 RODS

BC	Module base
3	CETOP 3/NG6
******	**30** = 3/8" BSP connectors in parallel **32** = 3/8" BSP connectors in series
00	No variant
1	Serial No.

Weight Kg. 1,4

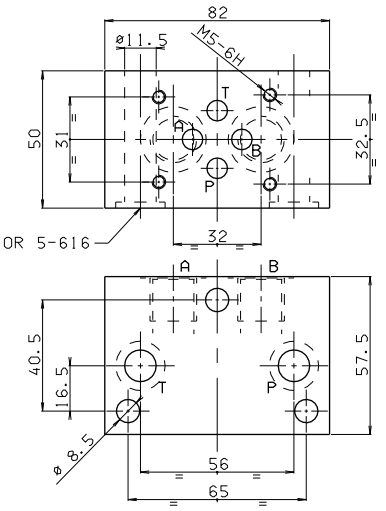

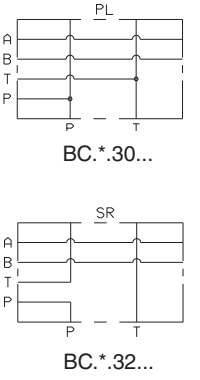

BC.3.40 - 3 RODS

BC	Module base
3	CETOP 3/NG6
40	Blanking
00	No variant
1	Serial No.

Weight: 0,7 Kg

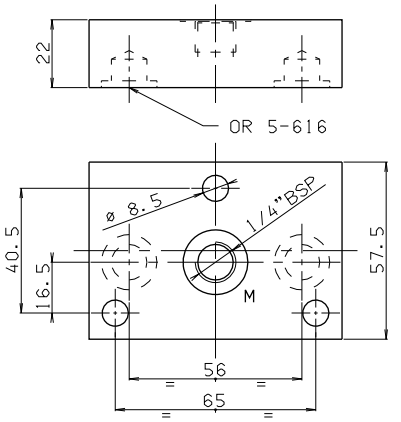



ASSEMBLED MODULAR COMPONENT BASES - 3 RODS

Rods code		L	Composition
BC.3.41/2	M80.20.0010	146	BC.3.25/27 + 2 BC.3.30/32 + BC.3.40
BC.3.41/3	M80.20.0011	196	BC.3.25/27 + 3 BC.3.30/32 + BC.3.40
BC.3.41/4	M80.20.0012	246	BC.3.25/27 + 4 BC.3.30/32 + BC.3.40
BC.3.41/5	M80.20.0013	296	BC.3.25/27 + 5 BC.3.30/32 + BC.3.40
BC.3.41/6	M80.20.0014	346	BC.3.25/27 + 6 BC.3.30/32 + BC.3.40
BC.3.41/7	M80.20.0015	396	BC.3.25/27 + 7 BC.3.30/32 + BC.3.40
BC.3.41/8	M80.20.0016	446	BC.3.25/27 + 8 BC.3.30/32 + BC.3.40

Nuts code	Q26.56.0514
Pieces	3



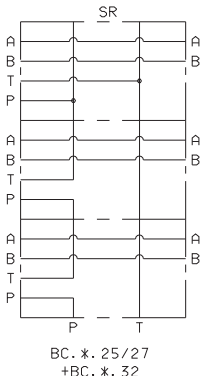

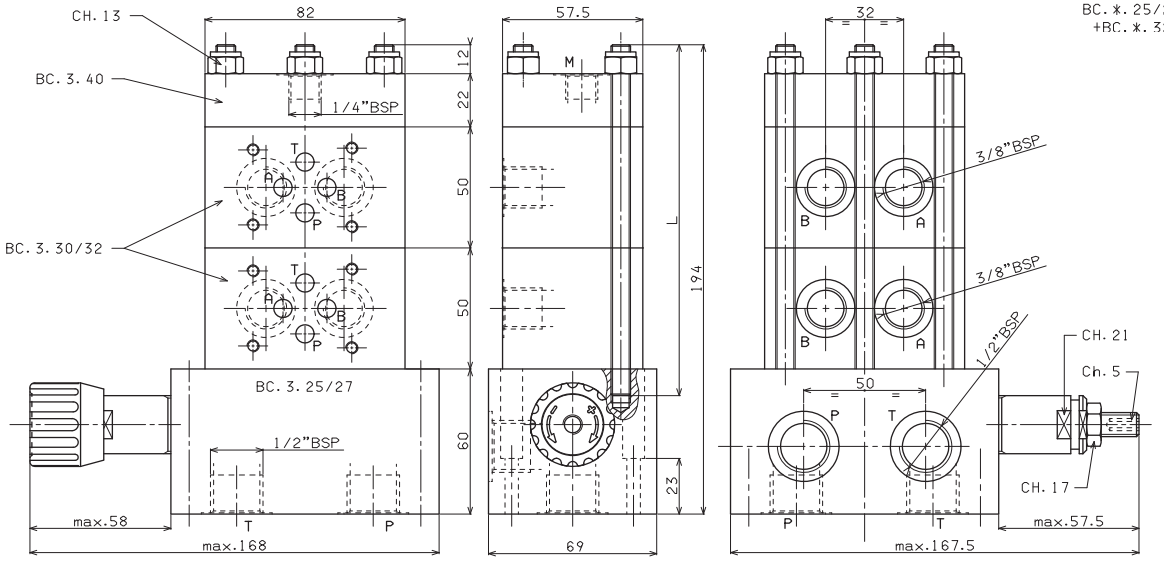

- **For series connection the last block high up should be connected in parallel (BC.3.30)**
- **Single components should be ordered separately**
- **The minimum permissible setting pressure depending on the spring: see cartridge valve type CMP.10...**

BC.3.41/* RODS FOR MODULAR ASSEMBLY

Rod code	Pieces	L	Composition
BC.3.41/2.00.1	3	146	for 2 solenoid valves
BC.3.41/3.00.1	3	196	for 3 solenoid valves
BC.3.41/4.00.1	3	246	for 4 solenoid valves
BC.3.41/5.00.1	3	296	for 5 solenoid valves
BC.3.41/6.00.1	3	346	for 6 solenoid valves
BC.3.41/7.00.1	3	396	for 7 solenoid valves
BC.3.41/8.00.1	3	446	for 8 solenoid valves

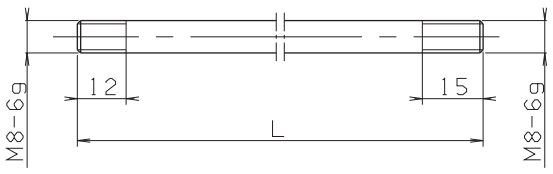

BC.3.50 INTERMEDIATE MODULE FOR PRESSURE GAUGE CONNECTION

BC	Module base
3	CETOP 3/NG6
50	Intermediate module for pressure gauge connection at ports A/B/P/T
00	No variant
1	Serial No.

Weight: 1 Kg

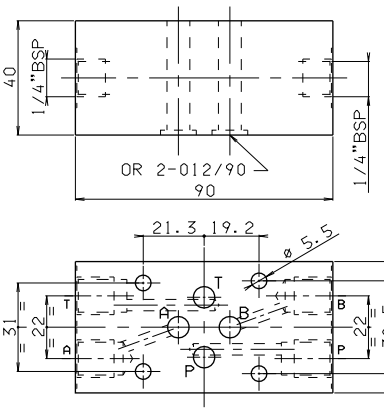



BC.3.51 DOWEL BASE PLATE FOR SOLENOID VALVE

BC	Module base
3	CETOP 3/NG6
51	Dowel base plate
00	No variant
1	Serial No.

Weight: 0,2 Kg
K = plate OR (Q25.95.0001)

CALIBRATED DIAPHRAGMS AVAILABLE

d	M8x1x8
0.6	M89.10.0007
0.7	M89.10.0008
0.8	M89.10.0009
0.9	M89.10.0012
1	M89.10.0010
1.2	M89.10.0011
1.4	M89.10.0038
1.5	M89.10.0035
1.75	M89.10.0042
2	M89.10.0041
2.5	M89.10.0036

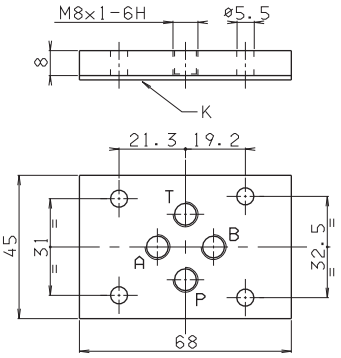





7

BC.3.07 BASE PLATE FOR DOUBLE FLOW RATE P→A AND B→T

BC	Module base
3	CETOP 3/NG6
07	bases plate for twin flow rate
00	No variant
1	Serial No.

Weight: 0,5 Kg

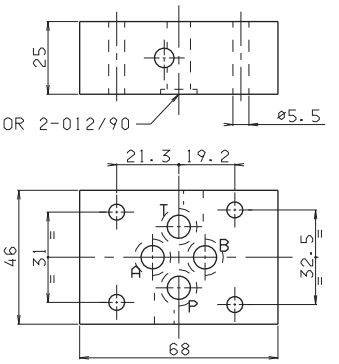



BC.3.107 BASE PLATE FOR USING 4 WAY VALVE AS 2 WAY ONLY

BC	Module base
3	CETOP 3/NG6
107	base for using 4 way valve as 2 way only
00	No variant
1	Serial No.
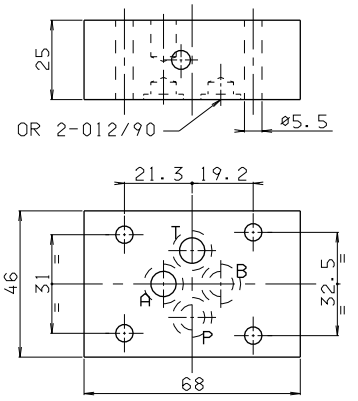
Weight: 0,5 Kg